


Matična ploča AM4 ASrock X570 Phantom Gaming 4 DP/HDMI

Šifra: 16563
Kategorija proizvoda: Matične ploče
Proizvođač: ASRock

Cena: **20.789,00** rsd.

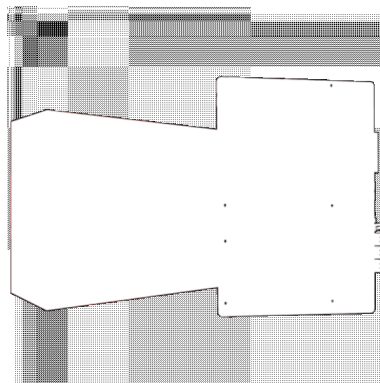

Tip procesora:	AMD
Podnožje:	AMD® AM4
Čipset:	AMD® X570
Format ploče:	ATX
Podržani procesori:	- Supports AMD AM4 socket Ryzen™ 2000 and 3000 series processors - Digi Power design - 10 Power Phase design
Podržana memorija:	DDR4
Memorija:	- Dual Channel DDR4 Memory Technology - 4 x DDR4 DIMM Slots - AMD Ryzen series CPUs (Matisse) support DDR4 4066+(OC) 4000(OC) 3866(OC) 3800(OC) 3733(OC) 3600(OC) 3466(OC) 32002933266724002133 ECC & non-ECC, un-buffered memory - AMD Ryzen series CPUs (Pinnacle Ridge) support DDR4 3466+(OC) 3200(OC) 2933266724002133 ECC & non-ECC, un-buffered memory - AMD Ryzen series CPUs (Picasso) support DDR4 3466+(OC) 3200(OC) 2933266724002133 non-ECC, un- buffered memory - Max. capacity of system memory: 128GB - 15μ Gold Contact in DIMM Slots
Integrisana grafička karta:	- Integrated AMD Radeon™ Vega Series Graphics in Ryzen Series APU - DirectX 12, Pixel Shader 5.0 - Shared memory default 2GB. Max Shared memory supports up to 16GB. - Dual graphics output: support HDMI and DisplayPort 1.2 ports by independent display controllers - Supports HDMI 2.0 with max. resolution up to 4K x 2K (4096x2160) @ 60Hz - Supports DisplayPort 1.2 with max. resolution up to 4K x 2K (4096x2160) @ 60Hz - Supports Auto Lip Sync, Deep Color (12bpc), xvYCC and HBR (High

Bit Rate Audio) with HDMI 2.0 Ports (Compliant HDMI monitor is required) - Supports HDR (High Dynamic Range) with HDMI 2.0 - Supports HDCP 2.2 with HDMI 2.0 and DisplayPort 1.2 Ports - Supports 4K Ultra HD (UHD) playback with HDMI 2.0 and DisplayPort 1.2 Ports - Supports Microsoft® PlayReady

Slotovi za proširenje:

AMD Ryzen series CPUs (Matisse) - 2 x PCI Express 4.0 x16 Slots (PCIe1PCIe3: single at x16 (PCIe1); dual at x16 (PCIe1) x4 (PCIe3)) AMD Ryzen series CPUs (Pinnacle Ridge) - 2 x PCI Express 3.0 x16 Slots (PCIe1PCIe3: single at x16 (PCIe1); dual at x16 (PCIe1) x4 (PCIe3)) AMD Ryzen series CPUs (Picasso) - 2 x PCI Express 3.0 x16 Slots (PCIe1PCIe3: single at x8 (PCIe1); dual at x8 (PCIe1) x4 (PCIe3)) - 2 x PCI Express 4.0 x1 Slots - Supports AMD Quad CrossFireX™ and CrossFireX™ - 1 x M.2 Socket (Key E), supports type 2230 WiFiBT module - 15µ Gold Contact in VGA PCIe Slot (PCIe1)

Storage:

- 8 x SATA3 6.0 Gbs Connectors, support RAID (RAID 0, RAID 1 and RAID 10), NCQ, AHCI and Hot Plug - 1 x Hyper M.2 Socket (M2_1), supports M Key type 223022422260228022110 M.2 PCI Express module up to Gen4x4 (64 Gbs) (with Matisse) or Gen3x4 (32 Gbs) (with Pinnacle Ridge and Picasso) - 1 x Hyper M.2 Socket (M2_3), supports M Key type 223022422260228022110 M.2 SATA3 6.0 Gbs module and M.2 PCI Express module up to Gen4x4 (64 Gbs) (with Matisse) or Gen3x4 (32 Gbs) (with Pinnacle Ridge and Picasso)

Mrežna karta:

- Gigabit LAN 101001000 Mbs - Giga PHY Intel® I211AT - Supports Wake-On-LAN - Supports LightningESD Protection - Supports Energy Efficient Ethernet 802.3az - Supports PXE

Zvučna karta:

- 7.1 CH HD Audio with Content Protection (Realtek ALC1200 Audio Codec) - Premium Blu-ray Audio support - Supports Surge Protection - ELNA Audio Caps - PCB Isolate Shielding - Individual PCB Layers for RL Audio Channel

USB:

- 1 x USB 2.0 Header (Supports 2 USB 2.0 ports) (Supports ESD Protection) - 2 x USB 3.2 Gen1 Headers (Support 4 USB 3.2 Gen1 ports) (Supports ESD Protection) - 2 x USB 3.2 Gen2 Type-A Ports (10 Gbs) (Supports ESD Protection) - 6 x USB 3.2

Gen1 Ports (Supports ESD Protection)

Konektori na zadnjoj strani:

- 3 x Antenna Ports (on IO Panel Shield) - 1 x PS2 MouseKeyboard Port - 1 x HDMI Port - 1 x DisplayPort 1.2 - 2 x USB 3.2 Gen2 Type-A Ports (10 Gbs) (Supports ESD Protection) - 6 x USB 3.2 Gen1 Ports (Supports ESD Protection) - 1 x RJ-45 LAN Port with LED (ACTLINK LED and SPEED LED) - HD Audio Jacks: Line in Front Speaker Microphone

Interni konektori:

- 1 x COM Port Header - 1 x SPI TPM Header - 1 x Power LED and Speaker Header - 2 x RGB LED Headers - 1 x Addressable LED Header - 1 x CPU Fan Connector (4-pin) - 1 x CPUWater Pump Fan Connector (4-pin) (Smart Fan Speed Control) - 3 x ChassisWater Pump Fan Connectors (4-pin) (Smart Fan Speed Control) - 1 x 24 pin ATX Power Connector - 1 x 8 pin 12V Power Connector - 1 x Front Panel Audio Connector - 1 x AMD LED Fan USB Header - 1 x Thunderbolt™ AIC Connector (5-pin) (Supports ASRock Thunderbolt™ 3 AIC Card R2.0 only) - 1 x USB 2.0 Header (Supports 2 USB 2.0 ports) (Supports ESD Protection) - 2 x USB 3.2 Gen1 Headers (Support 4 USB 3.2 Gen1 ports) (Supports ESD Protection)

Bios:

- 256Mb AMI UEFI Legal BIOS with GUI support - Supports "Plug and Play" - ACPI 5.1 compliance wake up events - Supports jumperfree - SMBIOS 2.3 support - CPU, CPU VDDCR_SOC, DRAM, VPPM, PREM VDD_CLDO, PERM VDDCR_SOC, +1.8V, VDDP, VDDG, CPU Load-Line Calibration, CPU VDDCR_SOC Load-Line Calibration Voltage Multi-adjustment

Razno:

{"url":"","title":"","target":""}