



Firma: G Store & Repair doo
Adresa: Bul.Mihajla Pupina 10z/3
Telefon: 011 785 66 66
Fax:
PIB: 112029009
E-mail: office@gstore.rs


MB AsRock s1151 H310CM-DVS

Šifra: 2546

Kategorija proizvoda: Matične ploče

Proizvođač: ASRock

Cena: 5.956 rsd.

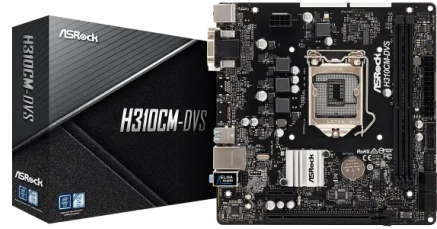

- Sapphire Black PCB
- High Density Glass Fabric PCB

ASRock Full Spike Protection (for all USB, Audio, LAN Ports)

ASRock Live Update & APP Shop

Chipset

- Intel® H310

BIOS

- 128Mb AMI UEFI Legal BIOS with multilingual GUI support
- ACPI 6.0 Compliant wake up events
- SMBIOS 2.7 Support
- DRAM, PCH 1.05V Voltage Multi-adjustment

Audio

- 7.1 CH HD Audio (Realtek ALC887/897 Audio Codec)
- Supports Surge Protection

Slots

- 1 x PCI Express 3.0 x16 Slot (PCIe2: x16 mode)

Connectors

- 1 x TPM Header
- *Supports 1/2/3/4-pin USB to 5-pin Header
- 1 x CPU Fan Connector (4-pin)*
- 1 x Chassis/Water Pump Fan Connector (4-pin) (Smart Fan Speed Control)**

- 1 x 24 pin ATX Power Connector
- 1 x 8 pin 12V Power Connector
- 1 x Front Panel Audio Connector
- 1 x USB 2.0 Header (Supports 2 USB 2.0 ports) (Supports ESD Protection)

- 1 x USB 3.1 Gen1 Header (Supports 2 USB 3.1 Gen1

- Supports 9th and 8th Gen Intel® Core™ Processors (Socket 1151)

- Supports CPU up to 95W
- 4 Power Phase design
- Memory
 - Supports Intel® Turbo Boost 2.0 Technology
 - Dual Channel DDR4 Memory Technology
 - 2 x DDR4 DIMM Slots
 - Supports DDR4 2666 / 2400 / 2133 non-ECC, unbuffered memory
 - Max. capacity of system memory: 32GB*
 - Supports Intel® Extreme Memory Profile (XMP) 2.0
 - 15µ Gold Contact in DIMM Slots

*Due to the operating system limitation, the actual memory size may be less than 4GB for the reservation for system usage under Windows® 32-bit OS. For Windows® 64-bit OS with 64-bit CPU, there is no such limitation.

- Supports Intel® UHD Graphics Built-in Visuals : Intel® Quick Sync Video with AVC, MVC (S3D) and MPEG-2 Full HW Encode1, Intel® InTru™ 3D, Intel® Clear Video HD Technology, Intel® Insider™, Intel® UHD Graphics
- DirectX 12
- HWA Encode/Decode: AVC/H.264, HEVC/H.265 8-bit, HEVC/H.265 10-bit, VP8, VP9 8-bit, VP9 10-bit (Decode only), MPEG2, MJPEG, VC-1
- Dual graphics output: Support DVI-D and D-Sub ports by independent display controllers
- Supports DVI-D with max. resolution up to 1920x1200 @ 60Hz
- Supports D-Sub with max. resolution up to 1920x1200 @ 60Hz
- Supports HDCP 2.2 with DVI-D Port

*Intel® UHD Graphics Built-in Visuals and the VGA outputs can be supported only with processors which are GPU integrated.

LAN

- PCIe x1 Gigabit LAN 10/100/1000 Mb/s
- 1 x Realtek RTL8111H
- Supports Wake-On-LAN
- Supports Lightning/ESD Protection
- Supports Energy Efficient Ethernet 802.3az
- Supports PXE

Storage

- 4 x SATA3 6.0 Gb/s Connectors, support NCQ, AHCI and Hot Plug